
INLET PROTECTION LOG TYPE

NOT-TO SCALE

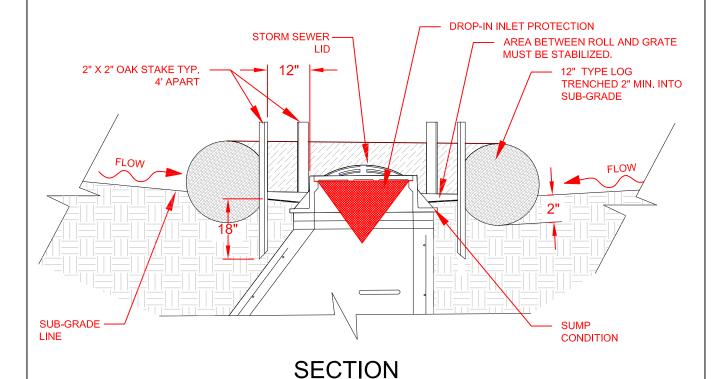

NOTES:

- 1. 2" x 2" nominal hardwood stakes, 4 foot minimum length, driven into ground approximately 18 inches, stakes driven a minimum width of 12 inches away from the drop inlet.
- 2. Area inside the log, from edge of fabric to structure, must be stabilized with Erosion Control Blanket, Turf Reinforcement Mat, Geotextile 592 Table 2 Class 2 or CA-7 stone
- 3. The maximum distance between the stakes should be 4 feet.
- 4. A maintenance schedule must maintain a sediment accumulation of less than 50% of the height of the log.

REFERENCE	STANDARD DWG. N	٧D.
Project	TUM-562	
Designed Date	וטויו-טטב	
Checked Date	SHEET 1 OF 1	
Approved Date	DATE 11-30-15	